
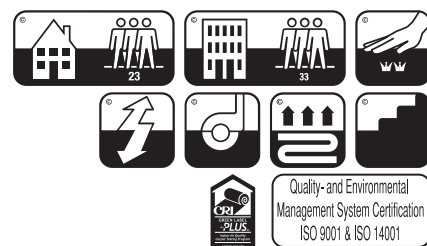


Gravure A630

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	6.0		inch	0.2		
Effective pile thickness	ISO 1766	mm	3.4		inch	0.13		
Total mass	ISO 8543	g/m²	1650		oz/yd²	48.7		
Total pile mass	ISO 2424	g/m²	670		oz/yd²	19.8		
Effective pile mass	ISO 8543	g/m²	480		oz/yd²	14.2		
Pile density	ISO 8543	g/cm³	0.141		lb/in³	0.0051		
Number of tufts	ISO 1763	/dm²	3160		/yd²	264208		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 2					
Impact sound reduction ΔL _w	ISO 10140	dB	27					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.100					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

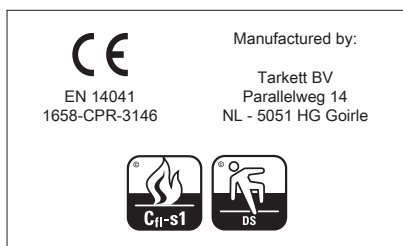



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure A900

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	5.8	inch		0.2		
Effective pile thickness	ISO 1766	mm	3.5	inch		0.14		
Total mass	ISO 8543	g/m²	2050	oz/yd²		60.5		
Total pile mass	ISO 2424	g/m²	885	oz/yd²		26.1		
Effective pile mass	ISO 8543	g/m²	610	oz/yd²		18.0		
Pile density	ISO 8543	g/cm³	0.174	lb/in³		0.0063		
Number of tufts	ISO 1763	/dm²	1645	/yd²		137538		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	27					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.00	0.05	0.05	0.20	0.45	0.55
Noise reduction	ISO 354	α _w	0.15					
Thermal resistance	ISO 8302	m².K/W	0.084					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

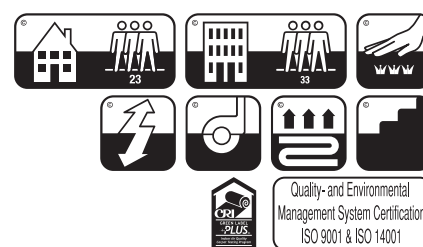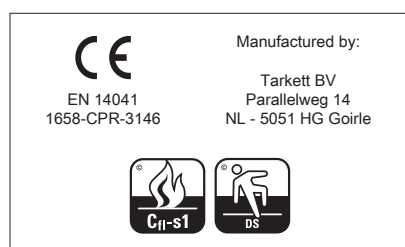


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure A930 LP

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Loop pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	6.0	inch		0.2		
Effective pile thickness	ISO 1766	mm	3.4	inch		0.13		
Total mass	ISO 8543	g/m²	1860	oz/yd²		54.9		
Total pile mass	ISO 2424	g/m²	906	oz/yd²		26.7		
Effective pile mass	ISO 8543	g/m²	525	oz/yd²		15.5		
Pile density	ISO 8543	g/cm³	0.154	lb/in³		0.0056		
Number of tufts	ISO 1763	/dm²	1732	/yd²		144813		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 2					
Impact sound reduction ΔL _w	ISO 10140	dB	27					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.130					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

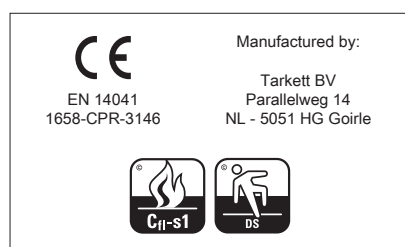


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure A1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	7.5	inch		0.3		
Effective pile thickness	ISO 1766	mm	4.6	inch		0.18		
Total mass	ISO 8543	g/m²	2015	oz/yd²		59.5		
Total pile mass	ISO 2424	g/m²	1060	oz/yd²		31.3		
Effective pile mass	ISO 8543	g/m²	735	oz/yd²		21.7		
Pile density	ISO 8543	g/cm³	0.160	lb/in³		0.0058		
Number of tufts	ISO 1763	/dm²	1775	/yd²		148408		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.150					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

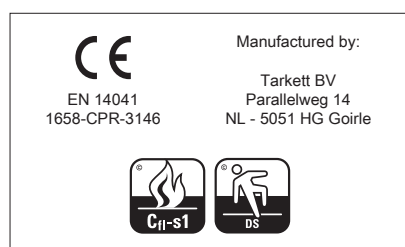


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure A1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	9.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.7	inch		0.22		
Total mass	ISO 8543	g/m²	2235	oz/yd²		66.0		
Total pile mass	ISO 2424	g/m²	1310	oz/yd²		38.7		
Effective pile mass	ISO 8543	g/m²	970	oz/yd²		28.6		
Pile density	ISO 8543	g/cm³	0.170	lb/in³		0.0061		
Number of tufts	ISO 1763	/dm²	1935	/yd²		161785		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	29					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

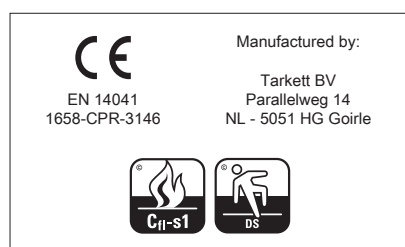


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure A1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	9.5		inch	0.4		
Effective pile thickness	ISO 1766	mm	6.2		inch	0.24		
Total mass	ISO 8543	g/m²	2365		oz/yd²	69.8		
Total pile mass	ISO 2424	g/m²	1420		oz/yd²	41.9		
Effective pile mass	ISO 8543	g/m²	1115		oz/yd²	32.9		
Pile density	ISO 8543	g/cm³	0.180		lb/in³	0.0065		
Number of tufts	ISO 1763	/dm²	2015		/yd²	168474		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 5					
Impact sound reduction ΔL _w	ISO 10140	dB	31					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

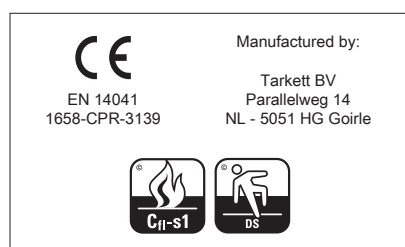



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AFH900

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	11.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	4.8	inch		0.19		
Total mass	ISO 8543	g/m²	2380	oz/yd²		70.2		
Total pile mass	ISO 2424	g/m²	885	oz/yd²		26.1		
Effective pile mass	ISO 8543	g/m²	615	oz/yd²		18.2		
Pile density	ISO 8543	g/cm³	0.128	lb/in³		0.0046		
Number of tufts	ISO 1763	/dm²	1975	/yd²		165130		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

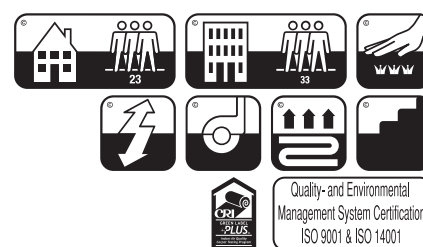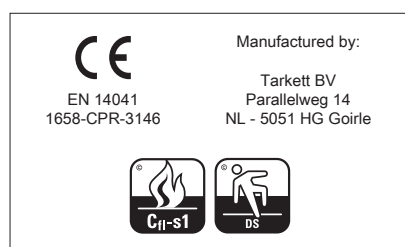



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure AFH1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	11.5		inch	0.5		
Effective pile thickness	ISO 1766	mm	4.6		inch	0.18		
Total mass	ISO 8543	g/m²	2555		oz/yd²	75.4		
Total pile mass	ISO 2424	g/m²	1060		oz/yd²	31.3		
Effective pile mass	ISO 8543	g/m²	735		oz/yd²	21.7		
Pile density	ISO 8543	g/cm³	0.160		lb/in³	0.0058		
Number of tufts	ISO 1763	/dm²	1775		/yd²	148408		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

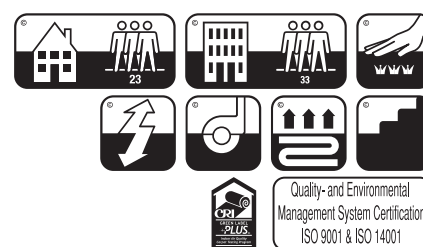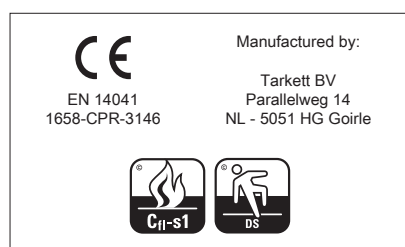


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AFH1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	13.5		inch	0.5		
Effective pile thickness	ISO 1766	mm	6.2		inch	0.24		
Total mass	ISO 8543	g/m²	2905		oz/yd²	85.7		
Total pile mass	ISO 2424	g/m²	1420		oz/yd²	41.9		
Effective pile mass	ISO 8543	g/m²	1115		oz/yd²	32.9		
Pile density	ISO 8543	g/cm³	0.180		lb/in³	0.0065		
Number of tufts	ISO 1763	/dm²	2015		/yd²	168474		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 5					
Impact sound reduction ΔL _w	ISO 10140	dB	39					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.210					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

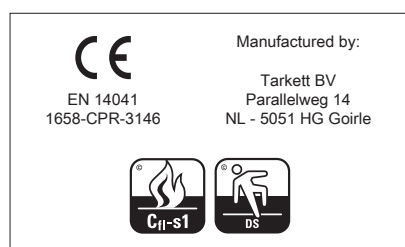



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190514

Gravure AFL900

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	9.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	4.8	inch		0.19		
Total mass	ISO 8543	g/m²	2060	oz/yd²		60.8		
Total pile mass	ISO 2424	g/m²	885	oz/yd²		26.1		
Effective pile mass	ISO 8543	g/m²	615	oz/yd²		18.2		
Pile density	ISO 8543	g/cm³	0.128	lb/in³		0.0046		
Number of tufts	ISO 1763	/dm²	1975	/yd²		165130		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	35					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

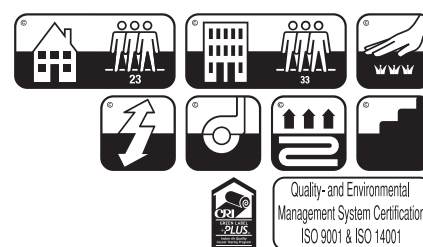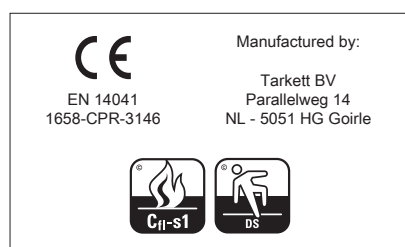



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AFL1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	9.5	inch		0.4		
Effective pile thickness	ISO 1766	mm	4.6	inch		0.18		
Total mass	ISO 8543	g/m²	2235	oz/yd²		66.0		
Total pile mass	ISO 2424	g/m²	1060	oz/yd²		31.3		
Effective pile mass	ISO 8543	g/m²	735	oz/yd²		21.7		
Pile density	ISO 8543	g/cm³	0.160	lb/in³		0.0058		
Number of tufts	ISO 1763	/dm²	1775	/yd²		148408		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	36					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

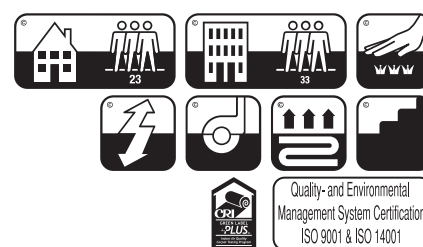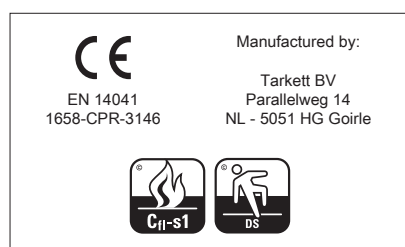



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AFL1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	11.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.7	inch		0.22		
Total mass	ISO 8543	g/m²	2455	oz/yd²		72.5		
Total pile mass	ISO 2424	g/m²	1310	oz/yd²		38.7		
Effective pile mass	ISO 8543	g/m²	970	oz/yd²		28.6		
Pile density	ISO 8543	g/cm³	0.170	lb/in³		0.0061		
Number of tufts	ISO 1763	/dm²	1935	/yd²		161785		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.190					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

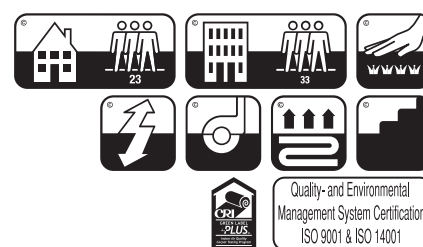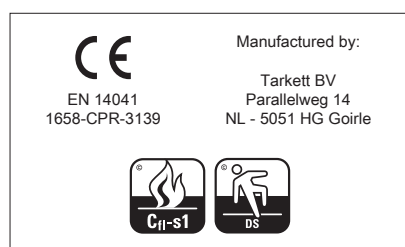



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AFL1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	11.5	inch		0.5		
Effective pile thickness	ISO 1766	mm	6.2	inch		0.24		
Total mass	ISO 8543	g/m²	2585	oz/yd²		76.3		
Total pile mass	ISO 2424	g/m²	1420	oz/yd²		41.9		
Effective pile mass	ISO 8543	g/m²	1115	oz/yd²		32.9		
Pile density	ISO 8543	g/cm³	0.180	lb/in³		0.0065		
Number of tufts	ISO 1763	/dm²	2015	/yd²		168474		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 5					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.200					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

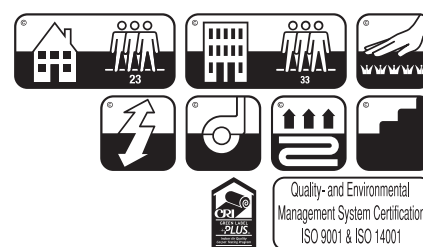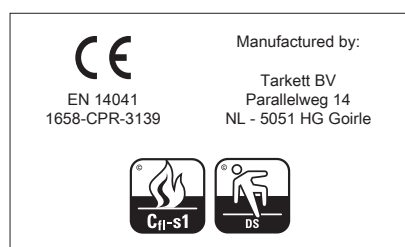



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190516

Gravure AP1000 GS

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Loop pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	7.0	inch		0.3		
Effective pile thickness	ISO 1766	mm	4.4	inch		0.17		
Total mass	ISO 8543	g/m²	1995	oz/yd²		58.9		
Total pile mass	ISO 2424	g/m²	1060	oz/yd²		31.3		
Effective pile mass	ISO 8543	g/m²	705	oz/yd²		20.8		
Pile density	ISO 8543	g/cm³	0.160	lb/in³		0.0058		
Number of tufts	ISO 1763	/dm²	1732	/yd²		144813		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	27					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

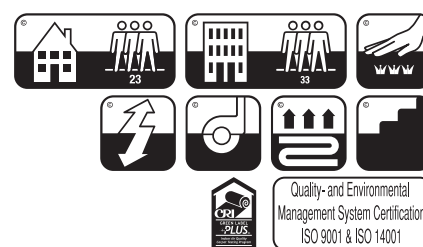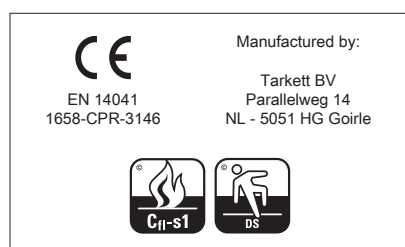



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure APST1150-LP

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Structured loop pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	8.0	inch		0.3		
Effective pile thickness	ISO 1766	mm	5.8	inch		0.23		
Total mass	ISO 8543	g/m²	2125	oz/yd²		62.7		
Total pile mass	ISO 2424	g/m²	1185	oz/yd²		35.0		
Effective pile mass	ISO 8543	g/m²	795	oz/yd²		23.5		
Pile density	ISO 8543	g/cm³	0.137	lb/in³		0.0049		
Number of tufts	ISO 1763	/dm²	1827	/yd²		152755		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.15					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

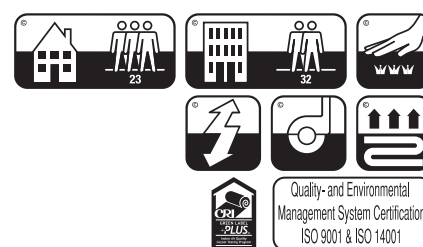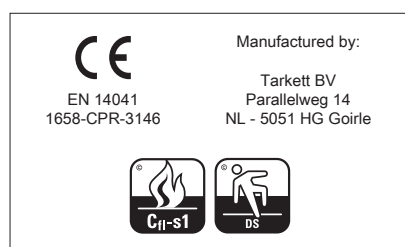



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure APST1150-TS

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Tip-sheared					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6					
Total thickness	ISO 1765	mm	7.5	inch		0.3		
Effective pile thickness	ISO 1766	mm	4.9	inch		0.19		
Total mass	ISO 8543	g/m²	2125	oz/yd²		62.7		
Total pile mass	ISO 2424	g/m²	1185	oz/yd²		35.0		
Effective pile mass	ISO 8543	g/m²	785	oz/yd²		23.2		
Pile density	ISO 8543	g/cm³	0.160	lb/in³		0.0058		
Number of tufts	ISO 1763	/dm²	1827	/yd²		152755		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.15					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

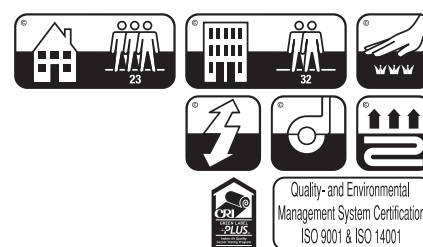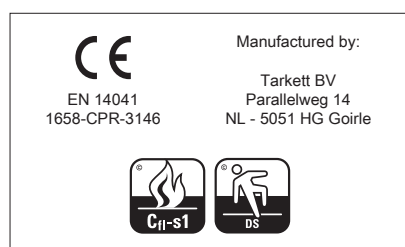


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure P1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	8.5	inch		0.3		
Effective pile thickness	ISO 1766	mm	5.2	inch		0.20		
Total mass	ISO 8543	g/m²	2200	oz/yd²		64.9		
Total pile mass	ISO 2424	g/m²	1030	oz/yd²		30.4		
Effective pile mass	ISO 8543	g/m²	780	oz/yd²		23.0		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2173	/yd²		181685		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.160					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

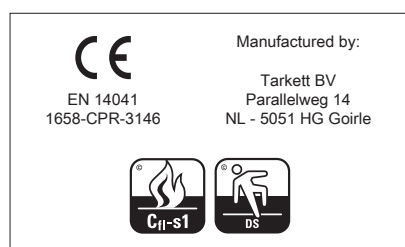


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure P1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	8.0	inch		0.3		
Effective pile thickness	ISO 1766	mm	5.8	inch		0.23		
Total mass	ISO 8543	g/m²	2130	oz/yd²		62.9		
Total pile mass	ISO 2424	g/m²	1215	oz/yd²		35.9		
Effective pile mass	ISO 8543	g/m²	810	oz/yd²		23.9		
Pile density	ISO 8543	g/cm³	0.140	lb/in³		0.0050		
Number of tufts	ISO 1763	/dm²	2291	/yd²		191551		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	29					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.160					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					


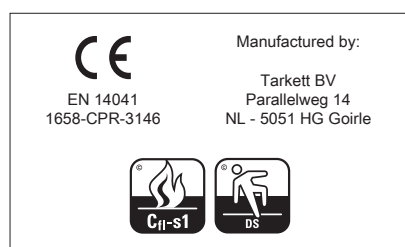


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	9.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	6.4	inch		0.25		
Total mass	ISO 8543	g/m²	2270	oz/yd²		67.0		
Total pile mass	ISO 2424	g/m²	1345	oz/yd²		39.7		
Effective pile mass	ISO 8543	g/m²	960	oz/yd²		28.3		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2449	/yd²		204761		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	31					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

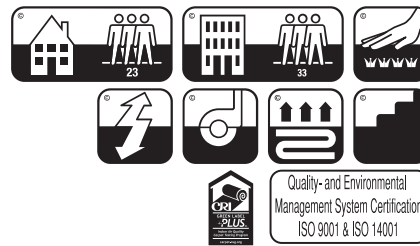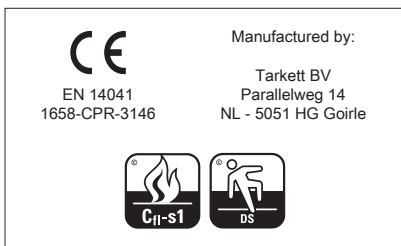



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure PFH1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	12.5	inch		0.5		
Effective pile thickness	ISO 1766	mm	5.2	inch		0.20		
Total mass	ISO 8543	g/m²	2530	oz/yd²		74.7		
Total pile mass	ISO 2424	g/m²	1030	oz/yd²		30.4		
Effective pile mass	ISO 8543	g/m²	780	oz/yd²		23.0		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2173	/yd²		181685		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	36					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

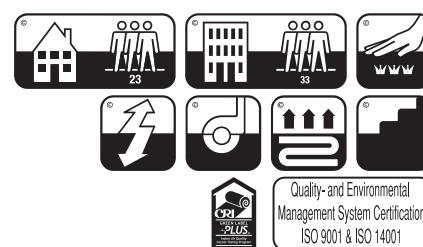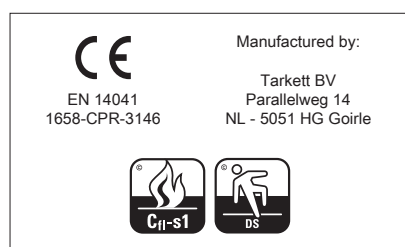



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure PFH1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400		ft	13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	12.0		inch	0.5		
Effective pile thickness	ISO 1766	mm	5.8		inch	0.23		
Total mass	ISO 8543	g/m²	2670		oz/yd²	78.8		
Total pile mass	ISO 2424	g/m²	1215		oz/yd²	35.9		
Effective pile mass	ISO 8543	g/m²	810		oz/yd²	23.9		
Pile density	ISO 8543	g/cm³	0.140		lb/in³	0.0050		
Number of tufts	ISO 1763	/dm²	2291		/yd²	191551		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	38					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.190					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

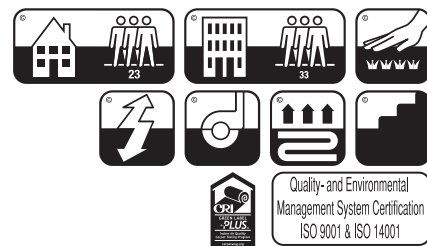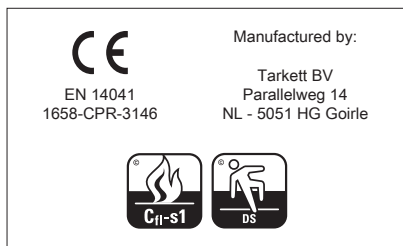


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure PFH1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	13.0	inch		0.5		
Effective pile thickness	ISO 1766	mm	6.4	inch		0.25		
Total mass	ISO 8543	g/m²	2810	oz/yd²		82.9		
Total pile mass	ISO 2424	g/m²	1345	oz/yd²		39.7		
Effective pile mass	ISO 8543	g/m²	960	oz/yd²		28.3		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2449	/yd²		204761		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	39					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.210					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

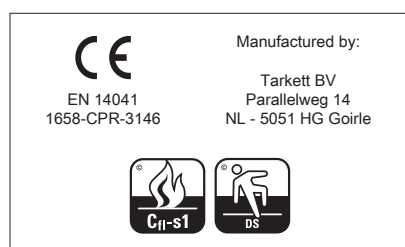



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure PFL1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	10.5	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.2	inch		0.20		
Total mass	ISO 8543	g/m²	2420	oz/yd²		71.4		
Total pile mass	ISO 2424	g/m²	1030	oz/yd²		30.4		
Effective pile mass	ISO 8543	g/m²	780	oz/yd²		23.0		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2173	/yd²		181685		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	34					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

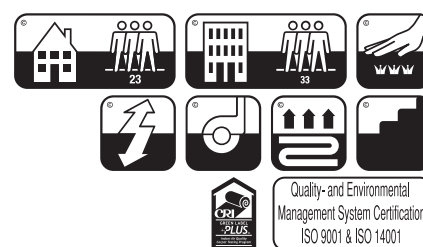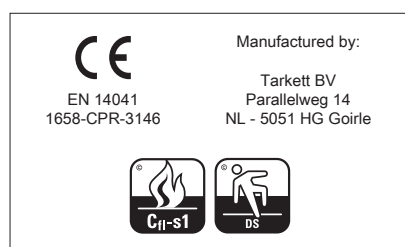


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure PFL1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	10.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.8	inch		0.23		
Total mass	ISO 8543	g/m²	2350	oz/yd²		69.4		
Total pile mass	ISO 2424	g/m²	1215	oz/yd²		35.9		
Effective pile mass	ISO 8543	g/m²	810	oz/yd²		23.9		
Pile density	ISO 8543	g/cm³	0.140	lb/in³		0.0050		
Number of tufts	ISO 1763	/dm²	2291	/yd²		191551		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		8DB576DD					


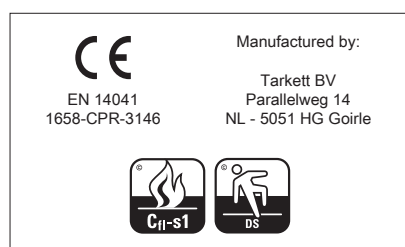


Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/10 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		BCF Polyamide 6.6					
Total thickness	ISO 1765	mm	11.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	6.4	inch		0.25		
Total mass	ISO 8543	g/m²	2490	oz/yd²		73.5		
Total pile mass	ISO 2424	g/m²	1345	oz/yd²		39.7		
Effective pile mass	ISO 8543	g/m²	960	oz/yd²		28.3		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	2449	/yd²		204761		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		33 Commercial - heavy use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.190					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

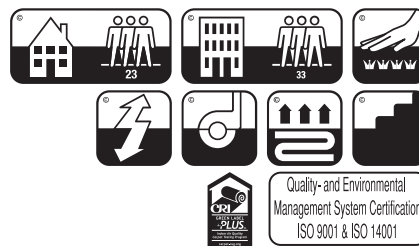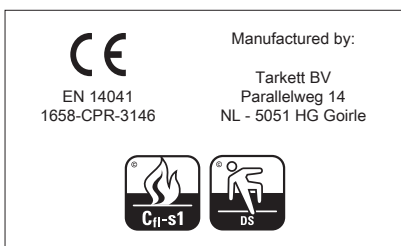



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

FN-20190515

Gravure W1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	7.5	inch		0.3		
Effective pile thickness	ISO 1766	mm	5.0	inch		0.20		
Total mass	ISO 8543	g/m²	2175	oz/yd²		64.2		
Total pile mass	ISO 2424	g/m²	1000	oz/yd²		29.5		
Effective pile mass	ISO 8543	g/m²	650	oz/yd²		19.2		
Pile density	ISO 8543	g/cm³	0.130	lb/in³		0.0047		
Number of tufts	ISO 1763	/dm²	1135	/yd²		94897		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	28					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.170					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

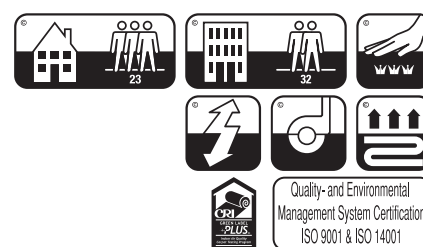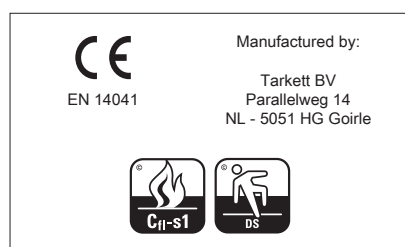



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure W1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	7.5	inch		0.3		
Effective pile thickness	ISO 1766	mm	5.6	inch		0.22		
Total mass	ISO 8543	g/m²	2335	oz/yd²		68.9		
Total pile mass	ISO 2424	g/m²	1170	oz/yd²		34.5		
Effective pile mass	ISO 8543	g/m²	785	oz/yd²		23.2		
Pile density	ISO 8543	g/cm³	0.140	lb/in³		0.0051		
Number of tufts	ISO 1763	/dm²	1230	/yd²		102840		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	29					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.180					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

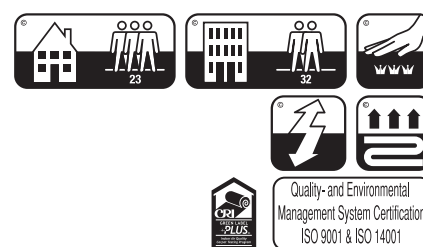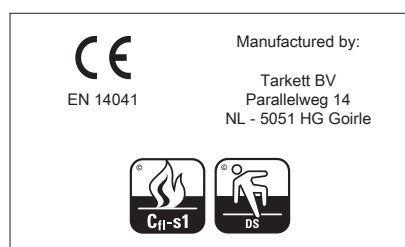



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure W1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Polypropylene woven					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	8.0	inch		0.3		
Effective pile thickness	ISO 1766	mm	6.3	inch		0.25		
Total mass	ISO 8543	g/m²	2435	oz/yd²		71.9		
Total pile mass	ISO 2424	g/m²	1290	oz/yd²		38.1		
Effective pile mass	ISO 8543	g/m²	945	oz/yd²		27.9		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	1325	/yd²		110783		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	31					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m².K/W	0.190					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

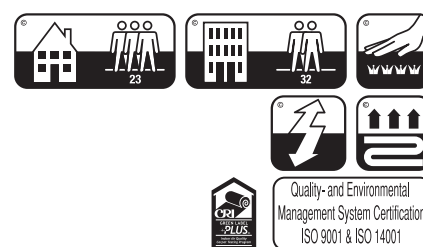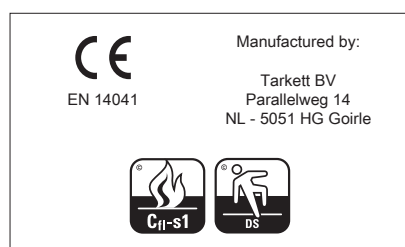



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFH1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	11.5	inch		0.5		
Effective pile thickness	ISO 1766	mm	5.0	inch		0.20		
Total mass	ISO 8543	g/m²	2715	oz/yd²		80.1		
Total pile mass	ISO 2424	g/m²	1000	oz/yd²		29.5		
Effective pile mass	ISO 8543	g/m²	650	oz/yd²		19.2		
Pile density	ISO 8543	g/cm³	0.130	lb/in³		0.0047		
Number of tufts	ISO 1763	/dm²	1135	/yd²		94897		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.200					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

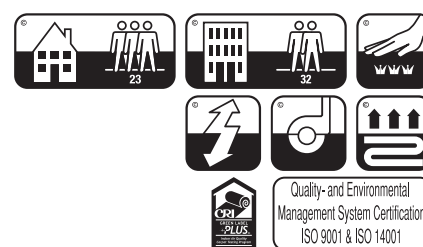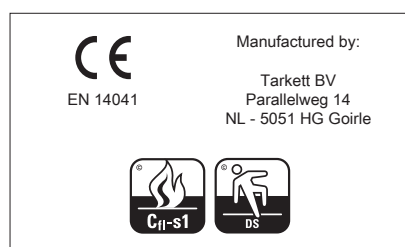



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFH1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	11.5	inch		0.5		
Effective pile thickness	ISO 1766	mm	5.6	inch		0.22		
Total mass	ISO 8543	g/m²	2875	oz/yd²		84.9		
Total pile mass	ISO 2424	g/m²	1170	oz/yd²		34.5		
Effective pile mass	ISO 8543	g/m²	785	oz/yd²		23.2		
Pile density	ISO 8543	g/cm³	0.140	lb/in³		0.0051		
Number of tufts	ISO 1763	/dm²	1230	/yd²		102840		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	38					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.210					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

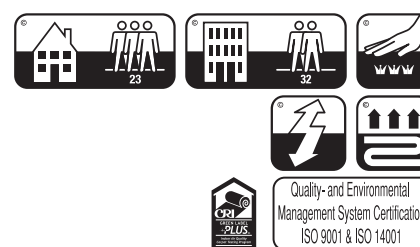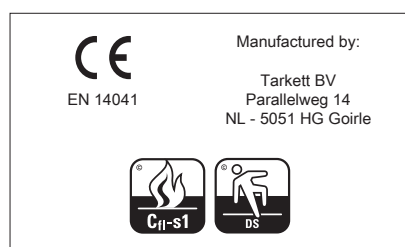



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFH1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 550g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	12.0	inch		0.5		
Effective pile thickness	ISO 1766	mm	6.3	inch		0.25		
Total mass	ISO 8543	g/m²	2975	oz/yd²		87.8		
Total pile mass	ISO 2424	g/m²	1290	oz/yd²		38.1		
Effective pile mass	ISO 8543	g/m²	945	oz/yd²		27.9		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	1325	/yd²		110783		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	39					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.40					
Thermal resistance	ISO 8302	m².K/W	0.230					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

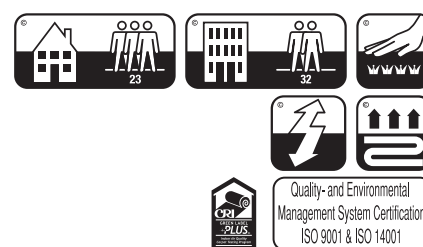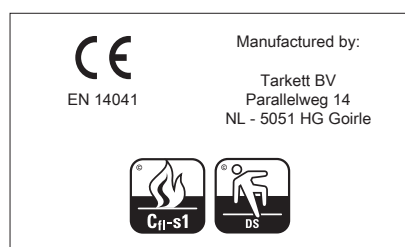



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFL1100

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	9.5	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.0	inch		0.20		
Total mass	ISO 8543	g/m²	2395	oz/yd²		70.7		
Total pile mass	ISO 2424	g/m²	1000	oz/yd²		29.5		
Effective pile mass	ISO 8543	g/m²	650	oz/yd²		19.2		
Pile density	ISO 8543	g/cm³	0.130	lb/in³		0.0047		
Number of tufts	ISO 1763	/dm²	1135	/yd²		94897		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	36					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.190					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

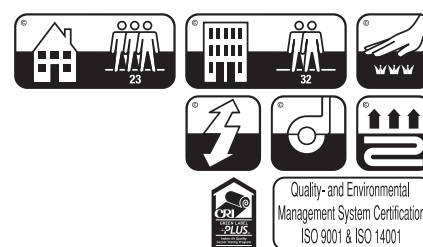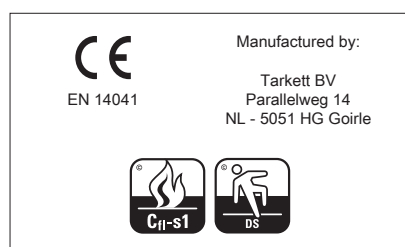



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFL1250

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 “					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	9.5	inch		0.4		
Effective pile thickness	ISO 1766	mm	5.6	inch		0.22		
Total mass	ISO 8543	g/m²	2555	oz/yd²		75.4		
Total pile mass	ISO 2424	g/m²	1170	oz/yd²		34.5		
Effective pile mass	ISO 8543	g/m²	785	oz/yd²		23.2		
Pile density	ISO 8543	g/cm³	0.140	lb/in³		0.0051		
Number of tufts	ISO 1763	/dm²	1230	/yd²		102840		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 3					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.200					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

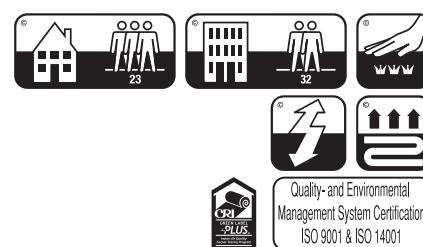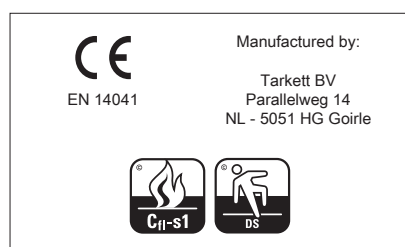



Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515

Gravure WFL1400

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 "					
Aspect	ISO 2424		Cut pile					
Dye method			Print					
Width		cm	400	ft		13.1		
Primary backing	ISO 2424		Polyester - polyamide fleece					
Secondary backing	ISO 2424		Felt backing 300g					
Pile fibre composition	ISO 2424		80% wool - 20% polyamide					
Total thickness	ISO 1765	mm	10.0	inch		0.4		
Effective pile thickness	ISO 1766	mm	6.3	inch		0.25		
Total mass	ISO 8543	g/m²	2655	oz/yd²		78.4		
Total pile mass	ISO 2424	g/m²	1290	oz/yd²		38.1		
Effective pile mass	ISO 8543	g/m²	945	oz/yd²		27.9		
Pile density	ISO 8543	g/cm³	0.150	lb/in³		0.0054		
Number of tufts	ISO 1763	/dm²	1325	/yd²		110783		
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307		32 Commercial - general use					
Luxury rating	EN 1307		LC 4					
Impact sound reduction ΔL _w	ISO 10140	dB	37					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	-	-	-	-	-	-
Noise reduction	ISO 354	α _w	0.30					
Thermal resistance	ISO 8302	m².K/W	0.220					
Flammability	EN 13501-1		Cfl - s1 (glued tested)					
Prodis - GUT	www.pro-dis.info		-					

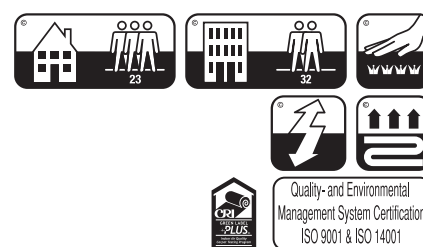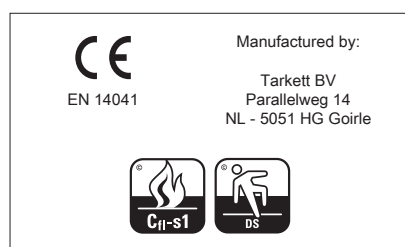

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20190515